

THE BEST SOLUTION FOR FOUNDATION CIVIL ENGINEERING | A COMFORTABLE DRIVING SOLUTION | HIGH-TORQUE TINY PILE DRIVER | ECO-FRIENDLY STAGE-V ENGINE

BUMA REXOME

Trust cannot be replaced

IMPACT PILING RIG IP80



* The above picture is an equipment with options and may differ from the actual product.



SPECIFICATIONS

REXOME IP80

WORK SPEED


WINCH-1	Line pull effective	10 ton
	Rope speed	57.5 m/min
WINCH-2	Line pull effective	10 ton
	Rope speed	57.5 m/min
SWING SPEED		3 rpm
DRIVE SPEED		1.87 km/h
COUNTERWEIGHT		15 ton
LEADER LENGTH		24 M
WEIGHT		82 ton
GROUND PRESSURE		1.3 km/cm ²

SINGLE AUGER

TYPE	Hydraulic
TORQUE	0~118 kN.m
LINE PULL EFFECTIVE	348 kN
CROWD SPEED	15.8 m/min

CASING AUGER

TYPE	Hydraulic
TORQUE	0~118 kN.m
LINE PULL EFFECTIVE	340 kN
CROWD SPEED	16 m/min

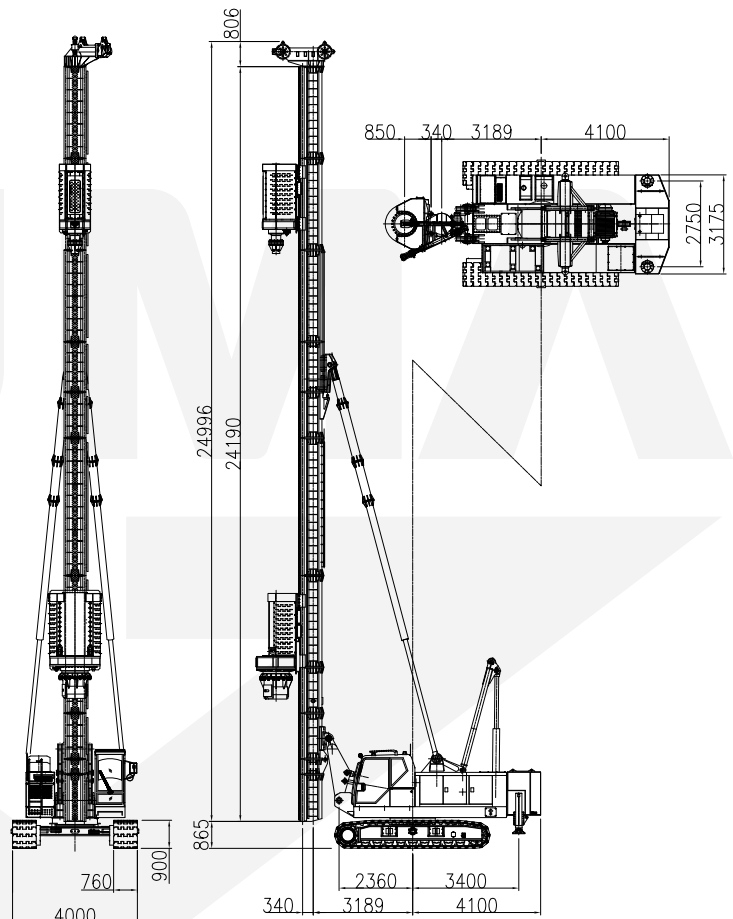

DIESEL ENGINE

POWER RATING	283kW(380hp) at1800rpm
MAX. TORQUE	1596N.m at 1400rpm
FUEL CONSUMPTION	210 g/kW-hr